

basicDIM Wireless User Interface

Casambi Ready wireless user interface



Product description

- _ Can be integrated in Casambi systems (Casambi Ready)
- _ Battery powered, wireless wall switch
- _ Forms automatically a wireless communication network with up to 250 nodes ^①
- _ Controls all types of basicDIM Wireless devices
- _ 4 scenes
- _ Dim up / down
- _ Colour temperature control
- _ 5 years guarantee (conditions at <https://www.tridonic.com/manufacture-guarantee-conditions>)
- _ We will provide security updates for the next five years after the date of purchase of this product

^① Depends on production number, see data sheet basicDIM Wireless User Interface.


Website

<http://www.tridonic.com/28002420>



basicDIM Wireless User Interface

Casambi Ready wireless user interface

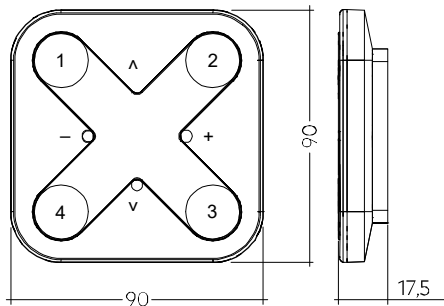

Ordering data

Type	Article number	Colour	Packaging, carton	Weight per pc.
basicDIM Wireless User Interface white	28002420	White	50 pc(s).	0.078 kg

Technical data

Battery Lithium-ion	CR 2430
Battery life	2 – 5 years, depending on usage
Radio transceiver operating frequencies	2.4 – 2.483 GHz
Max. output power radio transceiver (E.I.P.) ^②	< + 20 dBm
Wireless range, in open air	≤ 60 m
Ambient temperature ta	0 ... +45 °C
Lifetime	50,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)
Dimensions L x W x H	90 x 90 x 12 mm
Type of protection	IP20

Approval marks



② E.I.P.: Equivalent Isotropically Radiated Power.